

# Polygood®

# Material Data Sheet

# 2024



# Content



01	About Polygood®
01	Product Composition
02	Certification
03	Specifications
04	Product Groups
05	Group I. Light patterns
08	Group II. Dark patterns
10	Group III. Terrazzo patterns
12	Group IV. Grey & Emerald
14	Group V. Marbellous patterns
16	Group VI. Translucent patterns
19	Group VII. Salt Dune patterns



## About Polygood®

Polygood® stands as a remarkable achievement in sustainable surface materials. It's a Cradle to Cradle Certified® material, reflecting our unwavering commitment to environmental responsibility. Made entirely from 100% recycled and recyclable plastic, Polygood® panels are the only large-scale sustainable product of their kind. Each panel's composition consists of a single type of recycled

plastic, ensuring both simple recycling and robust, long-lasting quality.

The patterns derive from an array of post-consumer and post-industrial plastic waste sources, including items like refrigerators, single-use cutlery, household appliances, and manufacturing components.



## Product Composition

### 100% Recycled polystyrene

The Good Plastic Company has chosen recycled plastic as its sole material due to the company's commitment to reducing waste and contributing to the circular economy. This recycled plastic is sourced from EuCertPlast-certified suppliers specializing in recycling polystyrene derived from electronic and Waste from Electrical and

Equipment (WEEE), as well as post-consumer and post-industrial waste sources. Recycled polystyrene (rPS), which forms the entire composition of Polygood® panels, was selected due to its lower energy demand compared to other polymers during the production process, thereby reducing environmental impact.

### Captions



Scratch resistant



UV resistant



Waterproof



# Certification <sup>04</sup>

**Polygood® is the first material of its kind to achieve many certifications that validate the company's leadership in sustainable materials.**



The Cradle to Cradle® (C2C) certificate propels Polygood® to the forefront of the sustainable surface materials segment, offering architects, designers, and brands a trusted solution backed by rigorous analysis, audit, and testing. Polygood® is the first material of its kind to achieve this certification, solidifying The Good Plastic Company's position as an industry leader in sustainable materials and marking a significant milestone for the company.



Polygood®, has been granted a verified Environmental Product Declaration (EPD). This accomplishment underscores our unwavering commitment to sustainability and solidifies our leadership in the industry. An EPD includes the assessment of a product's environmental characteristics throughout its entire lifecycle, covering the entire value chain: from material extraction to production, product use, and end-of-life disposal.



A VOC A+ rating indicates that the surface material emits very low levels of VOCs into the indoor environment.

Polygood® aligns with BREEAM standards for construction materials, making it a low-VOC emitting material. We have conducted extensive tests to ensure that Polygood® doesn't emit any harmful substances.

# 05 Specifications



**Dimensions:**

2800 x 1400 mm (110" x 55")

**Thickness Tolerance:**

+/- 0.5 mm (+/- 0.02")

**Thickness gauges:**

12 mm (1/2"),  
19 mm (3/4")

**Finish:**

Standard: Semi-matte, single-faced  
Available upon request: Semi-gloss, high-gloss, or double-faced  
Coatings: Scratch-resistant, Fire-resistant

**Panel Weight:**

50-78 kg (110-172 lbs)








# Pattern Groups <sup>06</sup>



I — Light

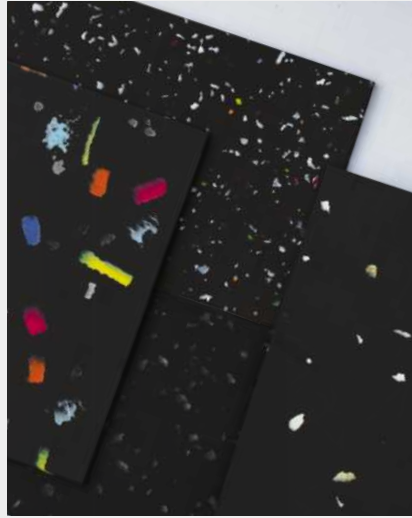

II — Dark



III — Terrazzo



IV — Grey & Emerald



V — Marbellous



VI — Translucent



VII — Salt Dune

# 07 Group I – Light



Madrid Content City by Dear Design, Revolution Limo Spain



Bathroom designs  
Netherlands



Table collection by Hello Again Design  
Switzerland & Germany



Installation for Paris Design Week 2023  
France



# Group I – Light <sup>08</sup>



**VICTORIOUS**

**#PS1507**

refrigerators and CD cases



**SEA FOAM GREY**

**#PS2404**

refrigerators and spools CNC shavings



**WHITE TERRAZZO**

**#PS2107**

refrigerators, single-use plastic cutlery



**WHITE LOLLIPOP**

**#PS1601**

refrigerators and single-use plastic cutlery



**VINTAGE PEARL**

**#PS1101**

refrigerators



**MILKY WAY**

**#PS1104**

refrigerators



**TIMELESS DUO**

**#PS1201**

consumer electronics, spools and refrigerators



\*Panel color may vary from the photo



# 09 Group I – Light



Test name	ISO	Indicator
Tensile modulus (psi)	ISO 527-2:2012 (method A)	272,381 psi
Tensile strength (psi)	ISO 527-2:2012 (method A)	3,191 psi
Modulus of elasticity	ISO 178:2010 (method B)	279,488 psi
Flexural strength	ISO 178:2010 (method B)	7,200 psi
Izod IMPACT STRENGTH TEST (Notched) ft-lb/in <sup>2</sup>	ISO 180:2019 (A1)	1.99 ft-lb/in <sup>2</sup>
Heat deflection temperature (°F)	ISO 180:2023 (method A)	165.56°F
Vicat Softening Temperature (°F)	ISO 306:2022	207.14°F



# Group II – Dark <sup>10</sup>



Nike Rise Westfield  
UK



LUSH Glatt  
Switzerland



The Evolve Chair by Tom Robinson  
UK






Adidas floor, by SAMJI Studio  
France



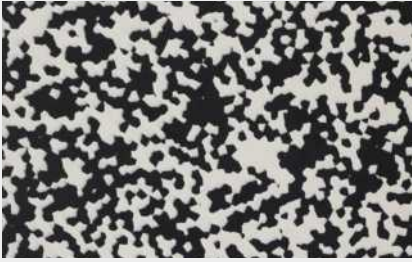

Morning co-working space  
France


# 11 Group II – Dark






**PATTERN NO. 5**    
**#PS1203**  
 refrigerators, consumer electronics,  
 spools



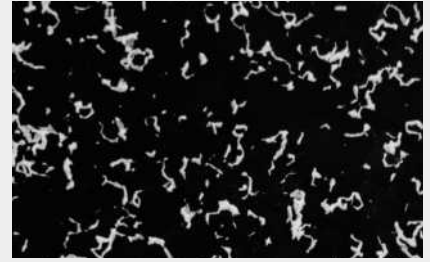

**BLACK LOLLIPOP**    
**#PS1602**  
 consumer electronics and single-use  
 plastic cutlery



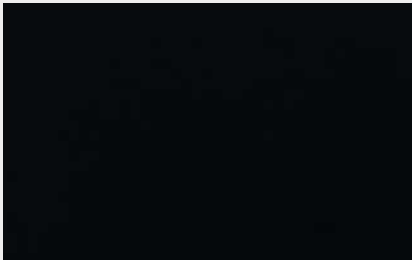


**SEA FOAM DARK**    
**#PS2401**  
 consumer electronics and single-use  
 plastic cutlery





**DARK KNIGHT**    
**#PS1103**  
 spools and consumer electronics

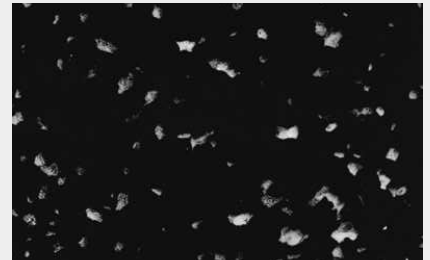

**REVERSE TIMELESS DUO**    
**#PS1202**  
 refrigerators and spools, consumer  
 electronics



**GHOST**    
**#PS1703**  
 refrigerators, tvs, keyboards,  
 mice, spools

\*Panel color may vary from the photo

Test name	ISO	Indicator
Tensile modulus (psi)	ISO 527-2:2012 (method A)	264,694 psi
Tensile strength (psi)	ISO 527-2:2012 (method A)	3,481 psi
Modulus of elasticity	ISO 178:2010 (method B)	273,977 psi
Flexural strength	ISO 178:2010 (method B)	7,543 psi
Izod IMPACT STRENGTH TEST (Notched) ft-lb/in <sup>2</sup>	ISO 180:2019 (A1)	1.72 ft-lb/in <sup>2</sup>
Heat deflection temperature (°F)	ISO 180:2023 (method A)	165.56°F
Vicat Softening Temperature (°F)	ISO 306:2022	206.42°F





# Group III – Terrazzo 12



Bar for London Design Festival 2023 by Isola UK



De Bijenkorf department store Netherlands




Soho Boutique Turia Hotel Spain



Furniture for Paris Design Week, 2023 France



Installation for Oslo Design Fair 2021 Norway

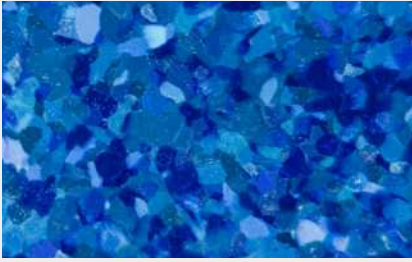

SAPPHIRE TERRAZZO

#PS1801

spools



TERRAZZO NUOVO

#PS1901

refrigerators



\*Panel color may vary from the photo

Test name	ISO	Indicator
Tensile modulus (psi)	ISO 527-2:2012 (method A)	272,236 psi
Tensile strength (psi)	ISO 527-2:2012 (method A)	3,278 psi
Modulus of elasticity	ISO 178:2010 (method B)	289,931 psi
Flexural strength	ISO 178:2010 (method B)	7,509 psi
Izod IMPACT STRENGTH TEST (Notched) ft-lb/in <sup>2</sup>	ISO 180:2019(A1)	1.65 ft-lb/in <sup>2</sup>
Heat deflection temperature (°F)	ISO 180:2023 (method A)	166.1°F
Vicat Softening Temperature (°F)	ISO 306:2022	206.96°F






# Group IV – Grey & Emerald

14



McDonald's UK exterior cladding  
UK

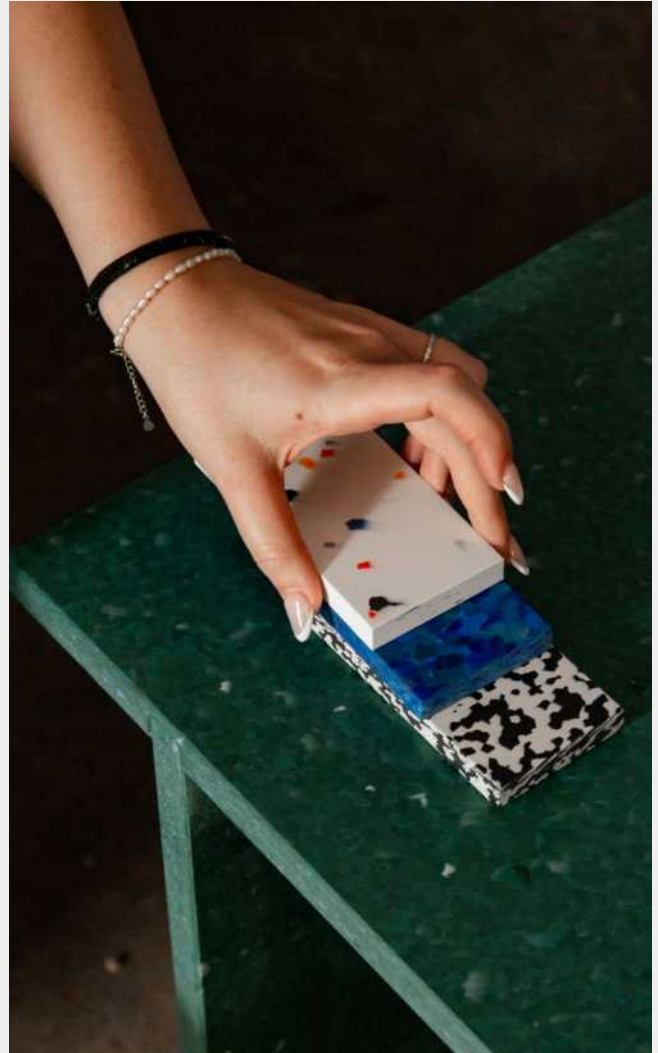


Furniture for London Design Festival, by Isola  
France




Regina collection lamps, by Robin  
Italy



Reel, by Tobia Zambotti  
Iceland

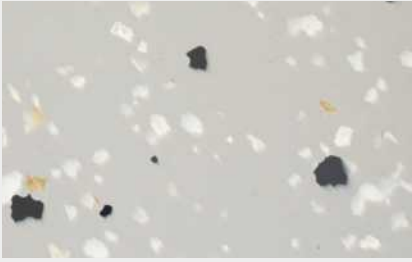

**MARBLE DESERT**  
#PS2110  
refrigerators and consumer electronics

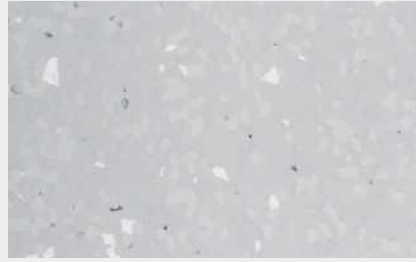

**GREYCIOUS**  
#PS1702  
home appliances and refrigerators



**PURE GREY**  
#PS1102  
home appliances



**EMERALD GHOST**  
#PS1706  
home appliances



\*Panel color may vary from the photo

Test name	ISO	Indicator
Tensile modulus (psi)	ISO 527-2:2012 (method A)	293,702 psi
Tensile strength (psi)	ISO 527-2:2012 (method A)	3,568 psi
Modulus of elasticity	ISO 178:2010 (method B)	304,725 psi
Flexural strength	ISO 178:2010 (method B)	8,034 psi
Izod IMPACT STRENGTH TEST (Notched) ft-lb/in <sup>2</sup>	ISO 180:2019 (A1)	1.89 ft-lb/in <sup>2</sup>
Heat deflection temperature (°F)	ISO 180:2023 (method A)	167.9°F
Vicat Softening Temperature (°F)	ISO 306:2022	205.34°F



# Group V – Marbellous

16



Marbellous chair, by SAMJI



The Gabrielle table, by SAMJI



Installation for Dutch Design Week

# 17 Group V – Marbellous



MARBELLOUS



#PS2001

cooling and freezing equipment

\*Panel color may vary from the photo

Test name	ISO	Indicator
Tensile modulus (psi)	ISO 527-2:2012 (method A)	283,404 psi
Tensile strength (psi)	ISO 527-2:2012 (method A)	3,655 psi
Modulus of elasticity	ISO 178:2010 (method B)	290,076 psi
Flexural strength	ISO 178:2010 (method B)	7,268 psi
Izod IMPACT STRENGTH TEST (Notched) ft-lb/in <sup>2</sup>	ISO 180:2019 (A1)	2.37 ft-lb/in <sup>2</sup>
Heat deflection temperature (°F)	ISO 180:2023 (method A)	168.62°F
Vicat Softening Temperature (°F)	ISO 306:2022	207.5°F





# Group VI – Translucent

18



Installation "Embracing the Elements"  
France



WAVE Chair, by Rouven Westerholt  
France



Installation "An Iceberg in the Desert Dubai"  
Dubai



Library by PlaceTic  
France



Installation "Climate Stripes," by Isola  
France



London Design Festival  
France





**MALDIVES**  
#PS1301  
CD cases



**CORAL REEF**  
#PS1501  
industrial tubes, acoustic panels



**TRANSLUCENT NEON GREEN**  
#PS1306  
CD cases



**TRANSLUCENT RED**  
#PS1308  
industrial tubes




**TRANSLUCENT GREEN**  
#PS1303  
refrigerators



**TRANSLUCENT CLEAR**  
#PS1305  
refrigerators, single-use cutlery



**TRANSLUCENT PINK**  
#PS1304  
refrigerators and cd cases

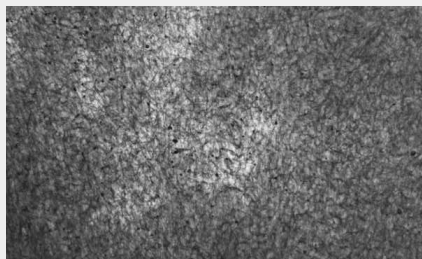

**TRANSLUCENT BLACK**  
#PS1309  
refrigerators, spools, CNC shavings




**YELLOW SUBMARINE**  
#PS1707  
refrigerators, single-use plastic cutlery



**ICE LOLLIPOP**  
#PS1503  
tubes, single-use plastic cutlery



**AQUA DRIFT**  
#PS1508  
CD cases, cutlery

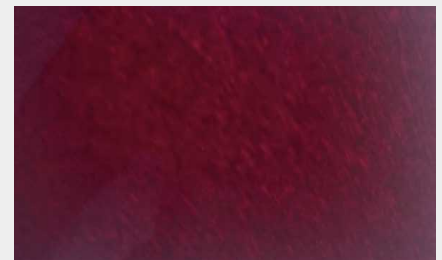


**TRANSLUCENT BURGUNDY**  
#PS1310  
CD cases

\*Panel color may vary from the photo



# Group VI – Translucent <sup>20</sup>

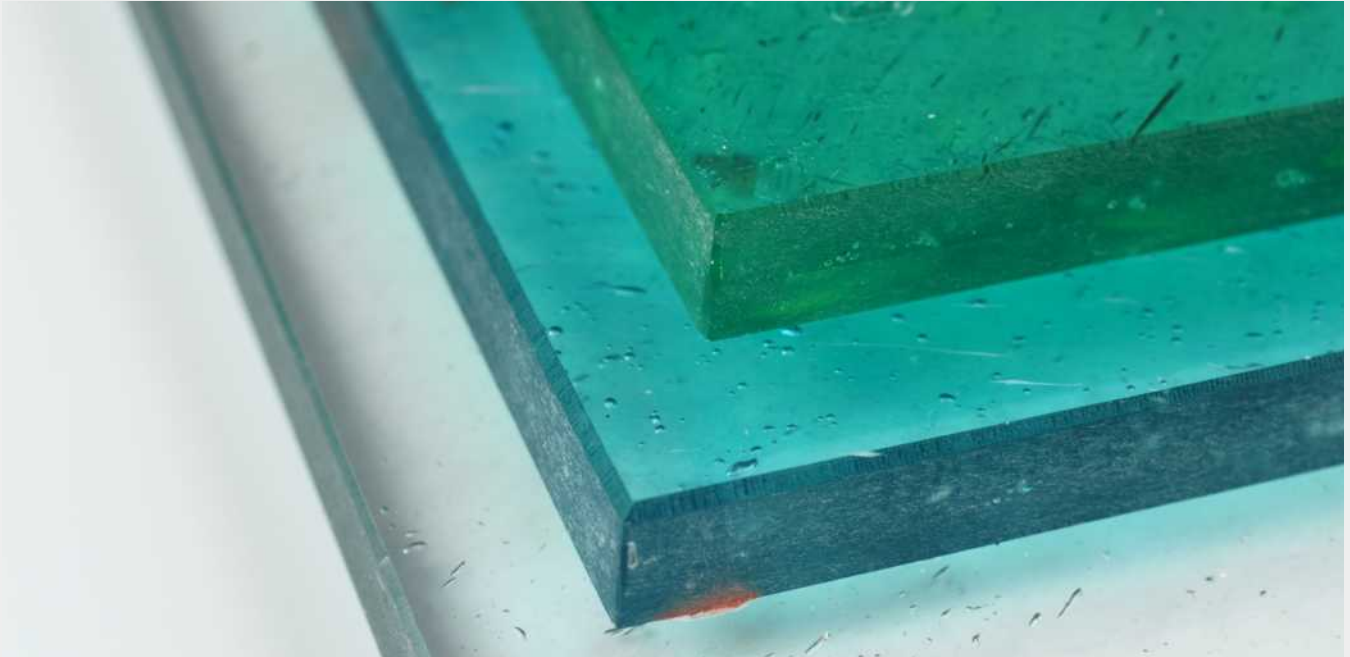

Test name	ISO	Indicator
Tensile modulus (psi)	ISO 527-2:2012 (method A)	272,381 psi
Tensile strength (psi)	ISO 527-2:2012 (method A)	3,191 psi
Modulus of elasticity	ISO 178:2010 (method B)	279,488 psi
Flexural strength	ISO 178:2010 (method B)	7,200 psi
Izod IMPACT STRENGTH TEST (Notched) ft-lb/in <sup>2</sup>	ISO 180:2019 (A1)	1.99 ft-lb/in <sup>2</sup>
Heat deflection temperature (°F)	ISO 180:2023 (method A)	165.56°F
Vicat Softening Temperature (°F)	ISO 306:2022	207.14°F

# 21 Group VII – Salt Dune



Furniture for Architizer A+ award  
France



Longevity Hub Prague  
Czechia



Reception for THBX store  
Netherlands



Spacesworks co-working centre  
Norway



Paris Design Week 2023  
France





# Group VII – Salt Dune <sup>22</sup>



SALT DUNE  
#PS1701  
spools



\*Panel color may vary from the photo

Test name	ISO	Indicator
Tensile modulus (psi)	ISO 527-2:2012 (method A)	377,389 psi
Tensile strength (psi)	ISO 527-2:2012 (method A)	5,061.83 psi
Modulus of elasticity	ISO 178:2010 (method B)	390,152 psi
Flexural strength	ISO 178:2010 (method B)	10,859 psi
Izod IMPACT STRENGTH TEST (Notched) ft-lb/in <sup>2</sup>	ISO 180:2019 (A1)	435.71 ft-lb/in <sup>2</sup>
Heat deflection temperature (°F)	ISO 180:2023 (method A)	174.2°F
Vicat Softening Temperature (°F)	ISO 306:2022	209.12°F



## Polygood®

[hello@thegoodplasticcompany.com](mailto:hello@thegoodplasticcompany.com)  
[www.polygood.com](http://www.polygood.com)

The Good Plastic Company Inc  
+1 888 565 3213  
One World Trade Center, 85th floor,  
New York, NY 10007

